
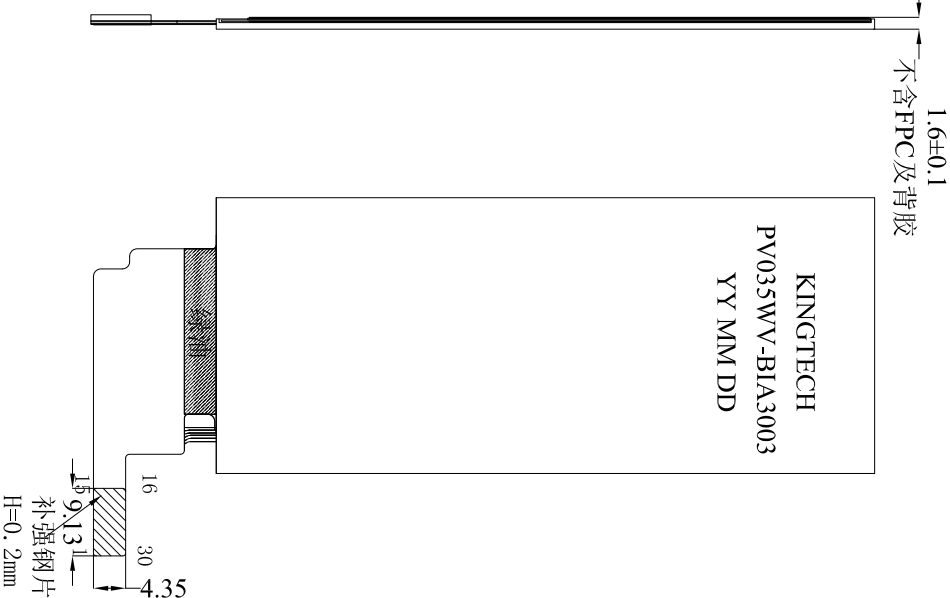


REV	ECN NO.	NATURE OF MODIFICATION	CHANGED BY	DATE
1.0		RELEASED PROPOSAL	AW	2023.09.19

PIN DESCRIPTION

01	NC
02	NC
03	GND
04	NC
05	NC
06	GND
07	TDPI1
08	TDN1
09	GND
10	TDP0
11	TDN0
12	GND
13	TCP
14	TCN
15	GND
16	RST
17	TE
18	LEDK
19	LEDK
20	LEDA
21	LEDA
22	VO28
23	VO18
24	SDA_CTP
25	SCL_CTP
26	EINT_CTP
27	VDD_CTP
28	NC
29	RST_CTP
30	GND

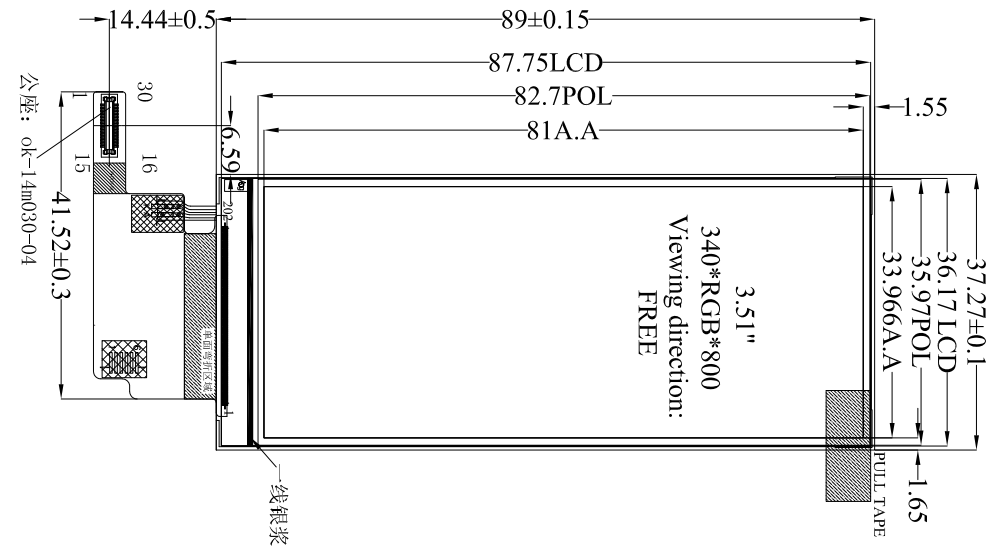


FPC弯折示意图
展开出货

触控接口定义:

1	RST
2	INT
3	SDA
4	SCL
5	VDD
6	GND

- NOTE:
1. DISPLAY TYPE: 3.51" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7701
 3. VIEWING DIRECTION: FREE
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. BACKLIGHT TYPE: 6 WHITE LEDS
 7. LED: If=15.0mA/LED, (CONSTANT CURRENT)
 8. (...) REFERENCE DIMENSION
 9. "mm" ICON MEAN CRITICAL DIM
 10. MUST MEET THE REQUIREMENT OF ROHS



If=20mA, Vf=1.9, 2V

350cd/m2(Min) 400cd/m2(Typ.)

UNIT	MM	TOLERANCE:	NAME	DATE	TITLE:	D/N:
3RD ANGLE		XX ±0.2			Kingtech Group Co., Ltd	
NOT IN SCALE		XXX ±0.2			LCM OUTLINE DIMENSION	P/N:
DRAWN BY:		ANG ±0.5			FILE NAME: PV035WV-BIA3003	Rev:V0
CHECKED BY:					FILE NO.:	Ver:A
APPROVED BY:						SH NO:1/1